


d ? -?

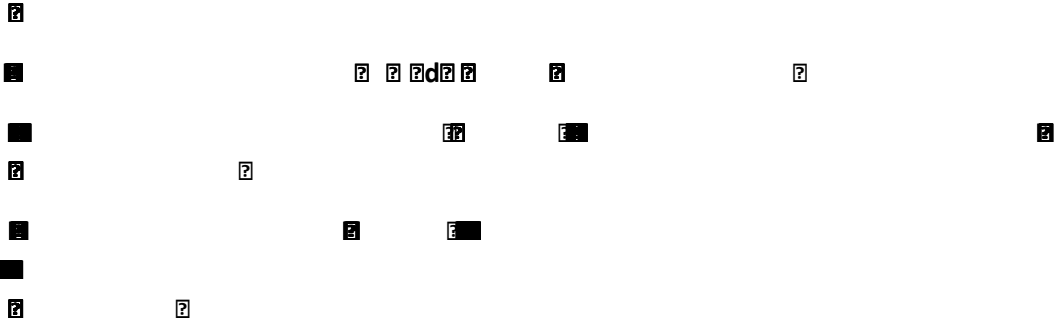

? ?

Version 1.23.1213 is packed with 07.07.11

07.07.11

07.07.11

and

v07.

07.07.11

?

?

?

-07.07.11

?

07.07.11

each

with the SPC Monitor P07.07.11

task.


t 07.07.11 ade a07.07.11

07.07.11

the


07.07.11

07.07.11

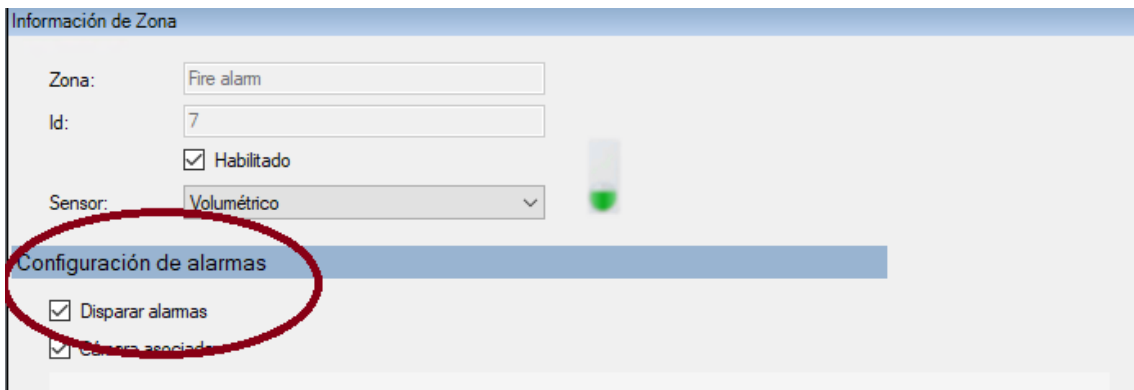


- The linking of camera(s) to the auto-configuration of alarms by zone system: this add-on revolutionises the experience by enabling you to automatically link one or more cameras to the activated zone when an alarm is set off.

We are proud to unveil the innovative '**auto-configuration of alarms by zone**' feature, which makes the process easier and enables you to control your security system more efficiently.

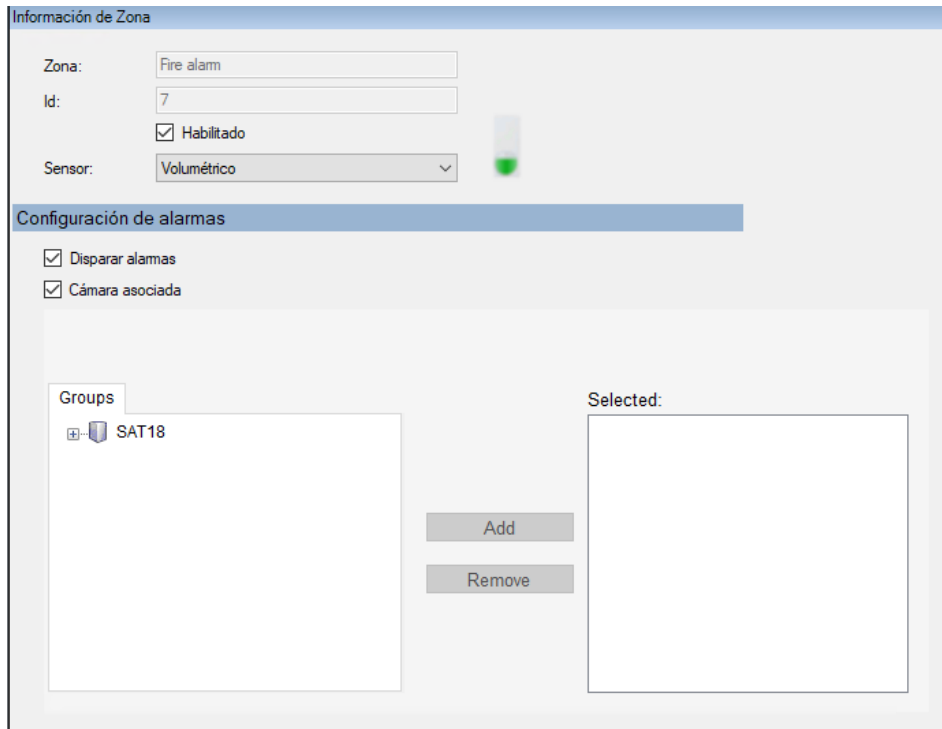


- Status details: what if you cannot remember what happened in a particular zone or to a specific intrusion panel? And what if you want to find out which events led to the current status of an element? To meet this need, we have created a new feature that enables you to get an accurate overview of the latest events that have occurred in relation to the selected element by just clicking on the icon associated with the field element (status details).



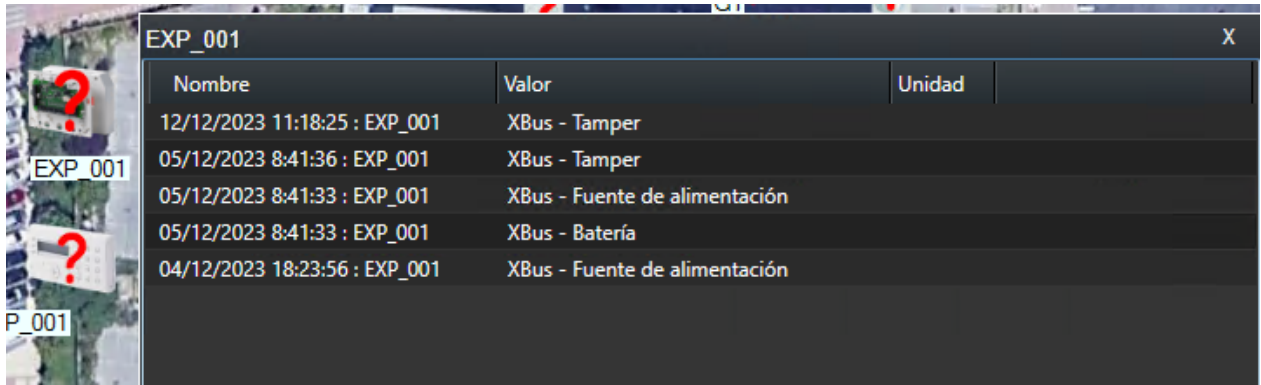


Nombre	Valor	Unidad
12/12/2023 11:18:25 : EXP_001	XBus - Tamper	
05/12/2023 8:41:36 : EXP_001	XBus - Tamper	
05/12/2023 8:41:33 : EXP_001	XBus - Fuente de alimentación	
05/12/2023 8:41:33 : EXP_001	XBus - Batería	
04/12/2023 18:23:56 : EXP_001	XBus - Fuente de alimentación	

- There is also the option to incorporate a visual alert when selecting the seismic detectors to pre-configure the intrusion panel in financial mode.

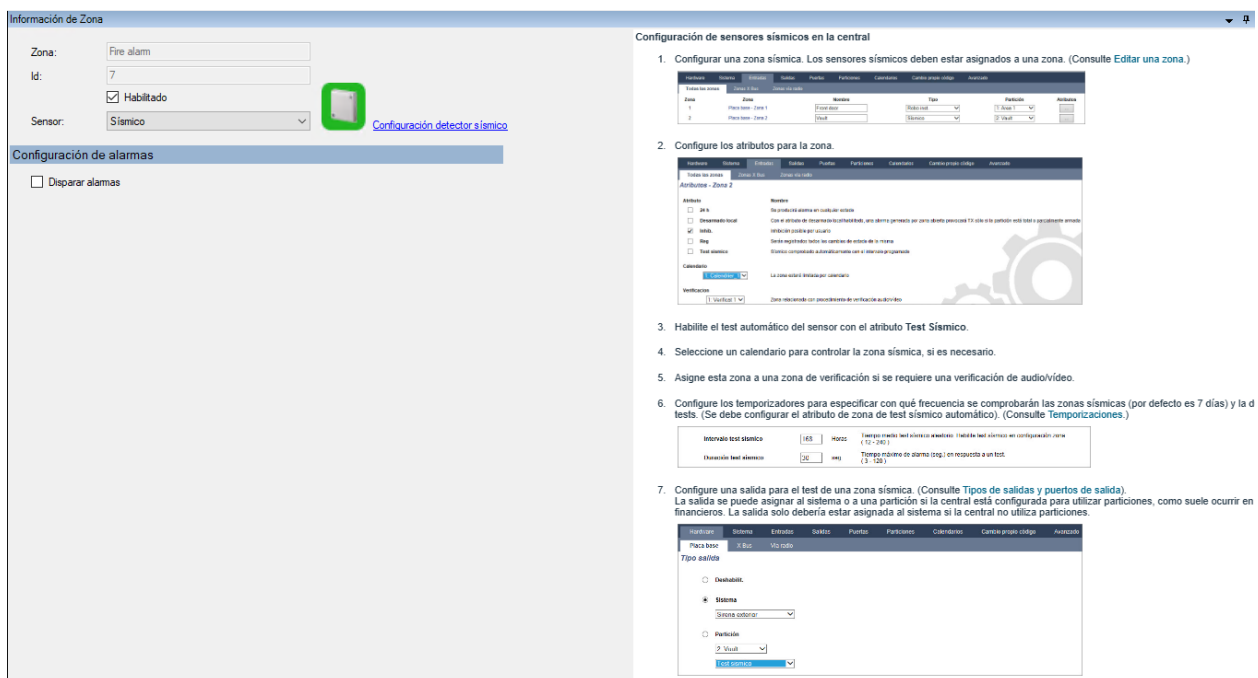


**Configuración de sensores sísmicos en la central**

1. Configurar una zona sísmica. Los sensores sísmicos deben estar asignados a una zona. (Consulte Editar una zona.)
2. Configure los atributos para la zona.
3. Habilite el test automático del sensor con el atributo Test Sísmico.
4. Seleccione un calendario para controlar la zona sísmica, si es necesario.
5. Asigne esta zona a una zona de verificación si se requiere una verificación de audio/vídeo.
6. Configure los temporizadores para especificar con qué frecuencia se comprobarán las zonas sísmicas (por defecto es 7 días) y la d tests. (Se debe configurar el atributo de zona de test sísmico automático). (Consulte Temporizaciones.)
7. Configure una salida para el test de una zona sísmica. (Consulte Tipos de salidas y puertos de salida). La salida se puede asignar al sistema o a una partición si la central está configurada para utilizar particiones, como suele ocurrir en financieros. La salida solo debería estar asignada al sistema si la central no utiliza particiones.

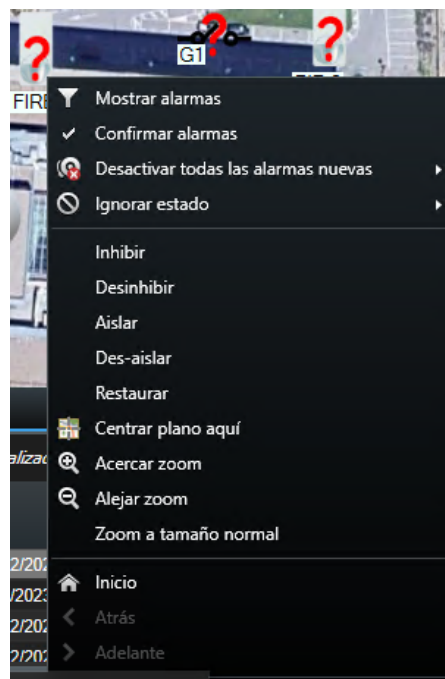

- Mostrar alarmas
- Confirmar alarmas
- Desactivar todas las alarmas nuevas
- Ignorar estado
- Inhibir
- Desinhibir
- Aislar
- Des-aislar
- Restaurar
- Centrar plano aquí
- Acercar zoom
- Alejar zoom
- Zoom a tamaño normal
- Inicio
- Atrás
- Adelante

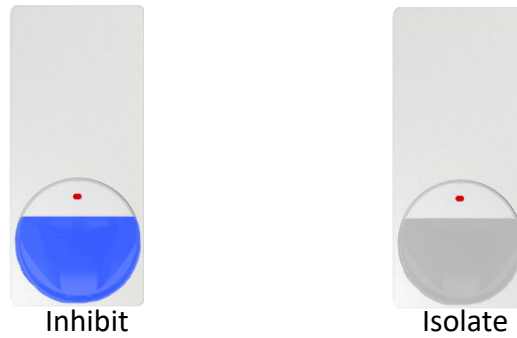

### Improvements

- The start-up of the plug-in has been redesigned to facilitate communication with the control panels.
- The communication process between the intrusion control panel(s) and the plugin has been streamlined.
- Compatibility across all versions of Milestone XProtect (from XProtect 2019 to XProtect 2023 R3) has been enhanced.



### Bug fixes

We have addressed the following issues:

- Occasional loss of data during start-up leading to a drop in connection with the plugin.

### System requirements

Make sure that your system meets the following requirements:

- Upgrade XProtect to the latest version or to a version compatible with SPC Monitor.

## **Compatibility**

This version is compatible with all versions of Milestone XProtect (from XProtect 2019 to XProtect 2023 R3) and the data saved on your system will not be lost during the software upgrade process.

## **Software upgrade process**

Please follow the steps below to upgrade to version 1.23.1213:

1. Copy the "License.lic" file located in c:\Program files\Milestone\SPC Monitor to a folder of your choice.
2. Uninstall the current plugin by going to "Uninstall Programs" and selecting "SPC Monitor".
3. Install the new plugin and reactivate the licence.

## **Contact details for technical support team**

If you encounter any problems or have any questions, please do not hesitate to get in touch with our technical support team. We are available via email and phone.

- Email: [sat@sgse.eu](mailto:sat@sgse.eu)
- Telephone: +34 910564396

## **Conclusion**

We thank you for your continued cooperation and patience. We have taken your valuable feedback on board and have used it to bring you this software upgrade. The creation of version 1.23.1213 is part of our commitment to the continuous improvement of this product so you can have the best possible experience when using it.